


KITO ER2M El-kædetalje i motorløbekat

KITO



Bæreevne: 125 - 5.000 kg

- Med motorløbekat MR2
- Leveres med én eller to hastigheder
- Kan leveres op til 20.000 kg

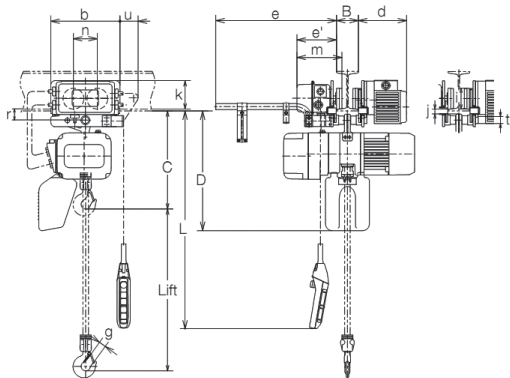

Type	Bæreevne kg	Effekt kW	Kørehastighed m/min.	Flangebredde B (mm)		Min. kurve radius mm	Egenvægt kg
				Standard	Mulighed		
ER2M-001IH-S/L	125	0,40	20 (10)	58 - 153	154 - 305	800	58
ER2M-003IS-S/L	250	0,40	20 (10)	58 - 153	154 - 305	800	58
ER2M-003IH-S/L		0,40	20 (10)	58 - 153	154 - 305	800	67
ER2M-005IL-S/L	500	0,40	20 (10)	58 - 153	154 - 305	800	63
ER2M-005IS-S/L		0,40	20 (10)	58 - 153	154 - 305	800	67
ER2M-010IL-S/L	1.000	0,40	20 (10)	58 - 153	154 - 305	800	75
ER2M-010IS-S/L		0,40	20 (10)	58 - 153	154 - 305	800	82
ER2M-016IS-S/L	1.600	0,40	20 (10)	82 - 178	179 - 305	800	110
ER2M-020IL-S/L	2.000	0,40	20 (10)	82 - 178	179 - 305	800	111
ER2M-020IS-S/L		0,40	20 (10)	82 - 178	179 - 305	800	127
ER2M-025IS-S/L	2.500	0,40	20 (10)	100 - 178	179 - 305	1000	150
ER2M-032IS-S/L	3.200	0,40	20 (10)	100 - 178	179 - 305	1000	153
ER2M-050IS-S/L	5.000	0,75	20 (10)	100 - 178	179 - 305	1800	198

Type	Bæreevne kg	Dimensioner (mm)													
		C	D	b	d	e	e'	g	i	j	k	m	n	r	t
ER2M-001IH-S/L	125	375	450	315	220	515	179	27	95	22	130	205	109	51	31
ER2M-003IS-S/L	250	375	450	315	220	515	179	27	95	22	130	205	109	51	31
ER2M-003IH-S/L		395	510	315	220	515	179	27	95	22	130	205	109	51	31
ER2M-005IL-S/L	500	395	510	315	220	515	179	27	95	22	130	205	109	51	31
ER2M-005IS-S/L		395	510	315	220	515	179	27	95	22	130	205	109	51	31
ER2M-010IL-S/L	1.000	435	550	315	220	515	179	31	95	22	130	205	109	51	31
ER2M-010IS-S/L		435	550	315	220	515	179	31	95	22	130	205	109	51	31
ER2M-016IS-S/L	1.600	505	630	325	225	520	184	34	110	27	125	212	118	60	36
ER2M-020IL-S/L	2.000	570	630	325	225	520	184	39	110	27	125	212	118	60	36
ER2M-020IS-S/L		585	630	325	225	520	184	39	110	27	125	21	118	60	36
ER2M-025IS-S/L	2.500	620	830	340	226	521	186	39	125	29	131	215	132	68	43
ER2M-032IS-S/L	3.200	765	900	340	226	521	186	44	125	29	131	215	132	68	43
ER2M-050IS-S/L	5.000	900	910	400	281	528	192	47	140	44	145	233	150	86	54